

AfriGreen®
African Green Distribution (Pty)





High Flow Water Filters





Pleated Carbon Filter

Activated Pleated Carbon Filter			
Part#	Max.Flow Rate	Capacity	Chlorine Reduction
AGD-ACP	56L/min	500 000 L	~90%


Specifications	
Media	Activated Carbon
End Couplings	Polypropylene
Seals	EPDM
Max Flow Rate	56L/min
Max temp.	50degC
Max Pressure Drop	2bar
Media Length	66cm
Carton Dims	18cm x 18cm x 79cm
Weight (each)	2,25kg
Micron Rating	5



Pleated Filter

Pleated Filter		
Part#	Media	Micron Rating
AGD-PL1a	Polypropylene fabric	1-guaranteed
AGD-PL	Polypropylene fabric	1
AGD-PL5	Polypropylene fabric	5
AGD-PL20	Polyester fabric	20
AGD-PL50	Polyester fabric	50
AGD-PL150	Mesh	150

Specifications	
Media	Polypropylene fabric / Polyester fabric / Mesh
End Couplings	Polypropylene
Seals	EPDM
Max Flow Rate	550L/min
Max temp.	50degC
Max Pressure Drop	2bar
Media Length	66cm
Carton Dims	18cm x 18cm x 79cm
Weight (each)	2,25kg
Micron Rating	1"g"/1/5/20/50/150

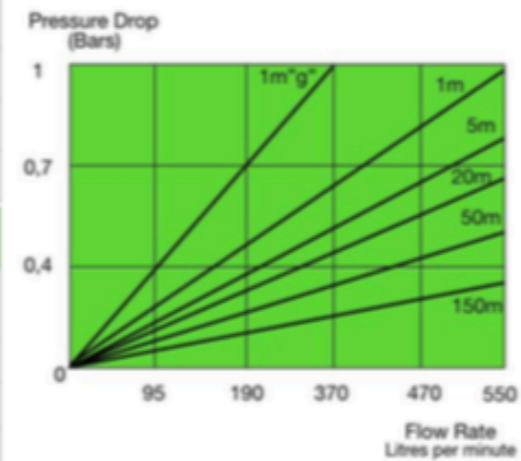



Melt Blown Filter

Melt Blown Filter		
Part#	Media	Micron Rating
AGD-MB1	Polypropylene	1
AGD-MB5	Polypropylene	5
AGD-MB20	Polypropylene	20
AGD-MB50	Polypropylene	50

Specifications	
Media	Polypropylene
End Couplings	Polypropylene
Seals	EPDM
Max Flow Rate	550L/min
Max temp.	50degC
Max Pressure Drop	2bar
Media Length	66cm
Carton Dims	18cm x 18cm x 79cm
Weight (each)	2,25kg
Micron Rating	1"µ"/1/5/20/50/150

